

SpinorsExtras - Mathematica implementation of massive spinor-helicity formalism

Jakub Kuczmarski¹

Institute of Theoretical Physics, Faculty of Physics, University of Warsaw

Abstract

We present `SpinorsExtras` package implementing massive spinor-helicity formalism in Mathematica on top of `SOM` package. Package defines new objects for Mathematica - massive spinors and reference, associated and polarization vectors. Various properties of introduced symbols and relations among them are implemented together with functions to manipulate and interchange such objects. The package can be used for symbolic calculation of helicity amplitudes involving massive particles with real or complex momenta, using on- or off-shell recursive techniques or Feynman diagrams.

¹e-mail: Jakub.Kuczmarski@fuw.edu.pl

1 Introduction

The Standard Model (SM) of strong and electroweak interactions has been successfully tested in numerous experiments. With very few exceptions, which still require further confirmation, results of them agree, within the experimental and theoretical errors, with the predictions of SM (extended with massive neutrino sector).

The constantly increasing precision of various measurements require relevant progress in accuracy of theoretical computations of SM expectations. It is especially important in the LHC era. The new energy range accessible in LHC experiments gives hope to finally spot some signs on New Physics - either direct new particle production or deviation from SM predictions in observables related to production of already known particles. However, the increase of achievable energy in hadron collider like LHC leads also to very serious complications in both data analysis and theoretical calculations. The latter include, in particular, calculating very tedious multi-leg and/or multi-loop QCD corrections to various amplitudes and proton PDF functions. The significant progress in simplifying and automatizing QCD calculations has been achieved in recent years using the spinor-helicity formalism and on-shell recursion techniques.

Spinor helicity formalism [1, 2, 3, 4, 5, 6, 7] consist of expressing scattering amplitudes calculated in quantum field theory by chiral spinors, objects that are transforming in lowest dimensional non-trivial representations of Lorentz group. Those “smallest pieces” give very granular control over amplitude and high potential for simplifications while retaining explicit Lorentz invariance.

The formalism is a natural language for an “on-shell recursion” in which only physical states propagate in amplitudes. It was first derived for massless Yang-Mills theories [8, 9] and developed into practical methods and tools of calculating QCD amplitudes. However, LHC with its high energy range and high luminosity is also an efficient source of massive particles - heavy quarks, massive gauge bosons and Higgs particles. To analyze their production, decays or more complicated processes (like for example potential unitarity violation in massive gauge boson rescattering) the generalization of on-shell recursion for theories with massive particles is necessary. Such generalizations have been discussed in several papers [10, 11, 12, 13, 14, 15, 16, 17, 18].

Efficient recursive calculation of complicated amplitudes, especially with many external particles, requires large degree of automatization and extensive use of computers for both analytical and numerical computations. To facilitate them, various packages and libraries of routines have been developed and published for general use [19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30]. In particular, set of routines designed for manipulating objects used in the massless spinor-helicity formalism in Mathematica has been implemented in the `SOM` (“Spinors at Mathematica”) package [31]. `SpinorsExtras` package presented in this article extends `SOM` capabilities by introducing symbols representing states of massive fermions: massive spinors, and vector bosons: polarization vectors along with their properties, relations between them and functions to manipulate and interchange them within the Mathematica code. Package provides also tools for management of reference vectors that determine the quantization axes, proportionality relation among spinors and various phase conventions for spinors and polarization vectors.

Package is well suited for calculation of helicity amplitudes involving massive particles using recursive (including on-shell) methods, Feynman diagrams, or other techniques employing massive spinor helicity formalism, but some of provided tools are also useful for easier manipulations of purely massless amplitudes.

The outline of this article is as follows. In Sec. 2 we define the notation used in the massive spinor-helicity formalism, with some extensions introduced (comparing to commonly used conventions). Sec. 3 provides technical details of package installation, bug reports, etc. Sec. 4 contains reference manual for all public symbols provided by the package. In Sec. 5 we present tutorial with simple example of package usage.

2 Notation

2.1 Chiral (massless) spinors

Dirac spinors for massless particle with momentum k and definite helicity/chirality are denoted by:

$$|k\rangle = u^+(k) = v^-(k) \quad |k] = u^-(k) = v^+(k) \quad (1a)$$

$$[k| = \bar{u}^+(k) = \bar{v}^-(k) \quad \langle k| = \bar{u}^-(k) = \bar{v}^+(k) \quad (1b)$$

For chiral spinors and their products we use conventions from **SQM** package [31]. Following this conventions angle spinors will also be called A spinors and square spinors will be also called B spinors.

2.2 Light cone decomposition

2.2.1 Lightlike reference vector

With any non-lightlike four-vector k , we can associate lightlike four-vector k^q using light cone decomposition with respect to an arbitrary lightlike four-vector q (such that $k \cdot q \neq 0$) [6, 32]:

$$k^q = k - \frac{k^2}{2k \cdot q} q \quad (2)$$

In the literature one can find various conventions for denoting associated vectors. **SpinorsExtras** package supports two conventions: k^q defined above which we call associated vector with explicit reference vector and k^b which we call associated vector with implicit reference vector.

Whenever **SpinorsExtras** package needs to infer explicit reference vector from associated vector with implicit reference vector k^b , “default reference vector for k ”, denoted by q_k , is used. In numerical considerations for $k^\mu = (k^0, \vec{k})$ default reference vector has following components $q_k = (\pm|\vec{k}|, -\vec{k})$ with minus for real negative k^0 and plus when k^0 is real non-negative or has nonzero imaginary part.

2.2.2 Non-lightlike reference vector

Given two non-proportional non-lightlike four-vectors k and p “simultaneous light cone decomposition” can be performed such that vector associated with one momentum is reference vector for the other [13]

$$k = k^p + \frac{k^2}{2k^p \cdot p^k} p^k \quad p = p^k + \frac{p^2}{2p^k \cdot k^p} k^p \quad (3)$$

Solving above system of equations for k^p and p^k gives unique, up to rescaling, lightlike basis of two-dimensional space, spanned by k and p .

$$k^p = \frac{(\text{sgn}(k \cdot p)\sqrt{\Delta} + k \cdot p) k - k^2 p}{2 \text{sgn}(k \cdot p)\sqrt{\Delta}} \quad p^k = \frac{(\text{sgn}(k \cdot p)\sqrt{\Delta} + k \cdot p) p - p^2 k}{2 \text{sgn}(k \cdot p)\sqrt{\Delta}} \quad (4)$$

where $\Delta = (k \cdot p)^2 - p^2 k^2$. For $k^2 = 0$ ($p^2 = 0$) formula for p^k (k^p) reduces to (2). It's worth noting that for any vector q (lightlike or not) non-proportional to k , belonging to space spanned by k and p and such that $k^p \cdot q \neq 0$, we have: $k^q = k^p$. In particular $k^{p^k} = k^p$.

2.3 Eigenstates of Pauli-Lubański projections

In relativistic theories one can define Pauli-Lubański pseudovector $W^\mu = \frac{1}{2}\epsilon^{\mu\nu\rho\sigma}J_{\nu\rho}k_\sigma$ where: $\epsilon_{\mu\nu\rho\sigma}$ is the Levi-Civita symbol, $J_{\nu\rho}$ is the relativistic angular momentum tensor and k_σ is the four-momentum.

We will consider eigenstates of normalized projection of Pauli-Lubański pseudovector W to axis given by arbitrary lightlike reference vector q such that $k \cdot q \neq 0$ i.e. eigenstates of $W(q)$ operator defined by:

$$W(q) = \frac{W \cdot q}{k \cdot q} \quad (5)$$

Multiplication of reference vector q by any non-zero complex number does not change $W(q)$ operator.

For any massive particle and any real lightlike reference vector q there exist reference frames in which three-momentum of this particle is parallel to spatial part of reference vector: $\vec{q}$. $W(q)$ operator reduces to helicity operator $\frac{\vec{S} \cdot \vec{k}}{|\vec{k}|}$ in those reference frames, so eigenstates of $W(q)$ are also eigenstates of helicity in such frames. For complex reference vector q such reference frames don't have to exist.

Considering rest frame of arbitrary timelike four-vector P , one may ask for which reference vector q operator $W(q)$ reduces to helicity operator in this reference frame. For particle with four-momentum k (P can not be proportional to k) helicity operator in considered frame is given by $W(Q^k)$ for Q being any linear combination of P and k , that is not proportional to k , e.g. $Q = P$ or $Q = P - k$.

2.3.1 Massive Dirac spinors

Dirac spinors associated with (possibly complex) four-vector k that are eigenstates of $W(q)$ are given by [6, 13, 14]:

$$|{}^q_+k\rangle = u^+(k, q) = |k^q\rangle + \frac{m_k}{[k^q|q]}|q\rangle \quad |{}^q_+k] = u^-(k, q) = |k^q] + \frac{m_k}{\langle k^q|q\rangle}|q\rangle \quad (6a)$$

$$[{}^q_+k| = \bar{u}^+(k, q) = [k^q| + \frac{m_k}{\langle q|k^q\rangle}\langle q| \quad \langle {}^q_+k| = \bar{u}^-(k, q) = \langle k^q| + \frac{m_k}{[q|k^q]}[q] \quad (6b)$$

$$|{}^q_-k\rangle = v^-(k, q) = |k^q\rangle - \frac{m_k}{[k^q|q]}|q\rangle \quad |{}^q_-k] = v^+(k, q) = |k^q] - \frac{m_k}{\langle k^q|q\rangle}|q\rangle \quad (6c)$$

$$[{}^q_-k| = \bar{v}^-(k, q) = [k^q| - \frac{m_k}{\langle q|k^q\rangle}\langle q| \quad \langle {}^q_-k| = \bar{v}^+(k, q) = \langle k^q| - \frac{m_k}{[q|k^q]}[q] \quad (6d)$$

Where by mass m_k we denote the principal square root of (possibly complex) k^2 , i.e. $m_k = \sqrt{|k^2|}e^{i\frac{\varphi}{2}}$ for $k^2 = |k^2|e^{i\varphi}$, $-\pi < \varphi \leq \pi$.

SpinorsExtras package **supports the convention above**, in which massive spinors are labeled by four-momentum. Comparing to other conventions, we introduced left subscript $+$ or $-$ (which we call mass sign, since it corresponds to two possible “signs of mass” such that $(\pm m_k)^2 = k^2$) denoting u or v spinors respectively and left superscript, if present, denoting explicit reference vector. If left superscript is not present massive spinor is considered to have implicit reference vector.

For $m_k = 0$ above spinors become independent of reference vector q and reduce to (1).

It's worth noting that for any solution of massive Dirac equation there always exist reference vector q such that this solution takes one of the forms presented above.

2.3.2 Polarization vectors

Transverse polarization vectors for particle with momentum k and mass m_k that are eigenstates of $W(q)$ are given by [32]:

$$\epsilon_\mu^+(k, q) = \frac{\langle q | \gamma_\mu | k^q \rangle}{\sqrt{2} \langle q | k^q \rangle} \quad \epsilon_\mu^-(k, q) = \frac{[q | \gamma_\mu | k^q]}{\sqrt{2} [q | k^q]} \quad (7a)$$

and longitudinal polarization vector is given by:

$$\epsilon_\mu^0(k, q) = -\frac{k_\mu}{m_k} + \frac{m_k}{k \cdot q} q_\mu = -\frac{k_\mu^q}{m_k} + \frac{m_k}{2k^q \cdot q} q_\mu \quad (7b)$$

Considerations involving exchanges of off-shell vector bosons sometimes require use of “scalar polarization” which is just rescaled momentum:

$$\epsilon_\mu^S(k, q) = \frac{k_\mu}{m_k} \quad (7c)$$

Polarization vectors of massless particles with momentum k , transverse to subspace spanned by k and arbitrary lightlike reference vector q can be taken the same as transverse vectors for massive case (7), but in this case k is lightlike by itself so $k^q = k$ [5, 6, 7, 32]. It’s worth noting that in massless case difference between polarization vectors for different reference vectors q is proportional to momentum k [6, 7].

`SpinorsExtras` package introduces **labels for above polarization vectors and functions for manipulating them**. Each polarization vector has also variant with implicit reference vector.

2.4 Spinor chains

`SpinorsExtras` package extends capabilities of `SOM` package by adding support for spinor chains involving massive spinors.

Spinor chains in our convention are denoted by:

$$\langle \begin{smallmatrix} q_1 \\ + \end{smallmatrix} k_1 | k_2 | \dots | k_{n-1} | \begin{smallmatrix} q_n \\ + \end{smallmatrix} k_n \rangle = \bar{u}^-(k_1, q_1) \not{k}_2 \dots \not{k}_{n-1} u^+(k_n, q_n) \quad (8)$$

and analogously, using (6), for square bracket at one or both sides and for chains involving v spinors.

Spinor chains with angle brackets on both ends are antisymmetric, same is true for square brackets:

$$\langle \begin{smallmatrix} q_1 \\ \pm \end{smallmatrix} k_1 | k_2 | \dots | k_{n-1} | \begin{smallmatrix} q_n \\ \pm \end{smallmatrix} k_n \rangle = -\langle \begin{smallmatrix} q_n \\ \pm \end{smallmatrix} k_n | k_{n-1} | \dots | k_2 | \begin{smallmatrix} q_1 \\ \pm \end{smallmatrix} k_1 \rangle \quad (9a)$$

$$[\begin{smallmatrix} q_1 \\ \pm \end{smallmatrix} k_1 | k_2 | \dots | k_{n-1} | \begin{smallmatrix} q_n \\ \pm \end{smallmatrix} k_n] = -[\begin{smallmatrix} q_n \\ \pm \end{smallmatrix} k_n | k_{n-1} | \dots | k_2 | \begin{smallmatrix} q_1 \\ \pm \end{smallmatrix} k_1] \quad (9b)$$

Spinor chains with different types of brackets on ends are symmetric:

$$\langle \begin{smallmatrix} q_1 \\ \pm \end{smallmatrix} k_1 | k_2 | \dots | k_{n-1} | \begin{smallmatrix} q_n \\ \pm \end{smallmatrix} k_n \rangle = [\begin{smallmatrix} q_n \\ \pm \end{smallmatrix} k_n | k_{n-1} | \dots | k_2 | \begin{smallmatrix} q_1 \\ \pm \end{smallmatrix} k_1] \quad (10)$$

Above identities are implemented in `SpinorsExtras` package.

2.5 Composite four-vectors

Any, lightlike or non-lightlike, four-vector k can be expressed by spinors in following way:

$$k^\mu = \frac{1}{2} [\begin{smallmatrix} q \\ \pm \end{smallmatrix} k | \gamma^\mu | \begin{smallmatrix} q \\ \pm \end{smallmatrix} k] \quad (11)$$

Reference vectors and mass signs of both spinors are the same. For real momentum and real reference vector angle and square spinors are Dirac conjugations of each others.

In many calculations it is useful to represent complex four-vector as a composition of two spinors, such that each of them is related to different real four-vector, that is also present in given calculation (like e.g. transverse polarization vectors or vector used for performing BCFW shifts). For such situations `SpinorsExtras` package introduces **general composite vector labels** $\eta(b, a)$, such that:

$$\eta^\mu(b, a) = \frac{1}{2} [b | \gamma^\mu | a \rangle \quad (12)$$

where b and a are arbitrary massless or massive spinor labels.

When both spinors are massless then $\eta(b, a)$ is also massless and we have:

$$\eta(b, a) = |b\rangle\langle a| + |a\rangle\langle b| \quad [\eta(b, a)] = [b] \quad |\eta(b, a)\rangle = |a\rangle \quad (13)$$

When one of spinors is massless and second is massive, composite vector is still massless:

$$\eta^\mu(\pm k, a) = \frac{1}{2} [\pm k | \gamma^\mu | a \rangle = \frac{1}{2} [k^b | \gamma^\mu | a \rangle = \eta^\mu(k^b, a) \quad [\eta(\pm k, a)] = [k^b] \quad |\eta(\pm k, a)\rangle = |a\rangle \quad (14a)$$

$$\eta^\mu(b, \pm k) = \frac{1}{2} [b | \gamma^\mu | \pm k \rangle = \frac{1}{2} [b | \gamma^\mu | k^b \rangle = \eta^\mu(b, k^b) \quad [\eta(b, \pm k)] = [b] \quad |\eta(b, \pm k)\rangle = |k^b\rangle \quad (14b)$$

For both spinors massive, composite vector is massive:

$$\eta_{(s_k k, s_p p)} \cdot \eta_{(s_k k, s_p p)} = m_k m_p \frac{\langle q_k | p^b \rangle [k^b | q_p]}{\langle q_k | k^b \rangle [p^b | q_p]} \quad (15)$$

and decomposes to sum of two massless vectors:

$$\eta^\mu_{(s_k k, s_p p)} = \frac{1}{2} [s_k k | \gamma^\mu | s_p p \rangle = \frac{1}{2} [k^b | \gamma^\mu | p^b \rangle + s_k s_p \frac{1}{2} \frac{m_k m_p}{\langle q_k | k^b \rangle [p^b | q_p]} \langle q_k | \gamma^\mu | q_p \rangle \quad (16)$$

$$= \eta^\mu(k^b, p^b) + s_k s_p \frac{m_k m_p}{\langle q_k | k^b \rangle [p^b | q_p]} \eta^\mu(q_k, q_p) \quad (17)$$

where $s_k, s_p = \pm 1$ are mass signs of spinors associated with k and p respectively.

2.6 Proportional spinors and vectors

Products of two massless angle spinors $|i\rangle, |j\rangle$ vanish $\langle i | j \rangle = 0$ if and only if those spinors are proportional. The same is true for square spinors. Thus proportionality is an important relation among spinors which leads to simplifications and restrictions on possible choices of reference vectors.

Two light-like four-vectors are proportional if and only if both spinors related to one vector are proportional to corresponding spinors of other vector.

`SpinorsExtras` package introduces **tools for establishing proportionality relations among spinors**.

2.7 Reference vectors

Quantities like associated vectors, massive spinors and polarization vectors depend on respective reference vectors. Amplitudes involving massless vector bosons or squares of absolute values of amplitudes with massive particles summed over spin states should be independent of choice of reference vectors.

`SpinorsExtras` package introduces **tools for checking this invariance and for choosing reference vectors for which expression take simplest forms**.

2.8 BCFW shifts

In addition to already implemented in **SQM** shifts of massless spinors, **SpinorsExtras** implements shifts suitable for massive fermions described in [13]. For two non-lightlike shifted momenta p and k the holomorphic shift is defined as:

$$p \rightarrow p + z\eta(p^k, k^p) \quad |_{\pm}^{k^p} p \rangle \rightarrow |_{\pm}^{k^p} p \rangle + z|k^p \rangle \quad [_{\pm}^{k^p} p| \rightarrow [_{\pm}^{k^p} p| \quad (18a)$$

$$k \rightarrow k - z\eta(p^k, k^p) \quad |_{\pm}^{p^k} k \rangle \rightarrow |_{\pm}^{p^k} k \rangle \quad [_{\pm}^{p^k} k| \rightarrow [_{\pm}^{p^k} k| - z[p^k| \quad (18b)$$

and anti-holomorphic shift as:

$$p \rightarrow p + z\eta(k^p, p^k) \quad |_{\pm}^{k^p} p \rangle \rightarrow |_{\pm}^{k^p} p \rangle \quad [_{\pm}^{k^p} p| \rightarrow [_{\pm}^{k^p} p| + z[k^p| \quad (19a)$$

$$k \rightarrow k - z\eta(k^p, p^k) \quad |_{\pm}^{p^k} k \rangle \rightarrow |_{\pm}^{p^k} k \rangle - z[p^k| \quad [_{\pm}^{p^k} k| \rightarrow [_{\pm}^{p^k} k| \quad (19b)$$

3 Mathematica package

Package is available on its webpage: <http://www.fuw.edu.pl/~jkuczm/SpinorsExtras/>
Source code is also hosted on GitHub: <https://github.com/jkuczm/SpinorsExtras>.

3.1 Installation

To use **SpinorsExtras** you also need Mathematica with **SQM** package [31] installed.

To install **SpinorsExtras** package evaluate in Mathematica following expression:

```
<< "https://raw.githubusercontent.com/jkuczm/SpinorsExtras/master/BootstrapInstall.m"
```

This will install **ProjectInstaller** package, if you don't have it already installed. Then **SpinorsExtras** will be installed together with following dependencies: **EvaluationUtilities**, **MessagesUtilities**, **OptionsUtilities**, **PatternUtilities**, **ProtectionUtilities**, **StringUtilities** and **MUnitExtras**.

You can install **SpinorsExtras** package manually by downloading **SpinorsExtrasWithDependencies.zip** and extracting it to any directory which is on Mathematica path. To see list of those directories evaluate **\$Path** in Mathematica. Most appropriate directory is the one starting with value of **\$UserBaseDirectory** variable with **Applications** directory at the end.

To load the package evaluate **Needs["SpinorsExtras"]**

3.2 Documentation

SpinorsExtras package comes with documentation integrated with Mathematica documentation center. To use it, open the documentation center (**Help > Documentation Center**) and type "SpinorsExtras" in the search field.

Documentation for any individual symbol from **SpinorsExtras** package, can be also called by selecting this symbols name in Mathematica and pressing the F1 key. Symbols reference pages in documentation center, in addition to reference provided in this paper, contain also many examples how to use given symbol, command or function.

[Online version of documentation](#) is available on project website.

3.3 Tests

`SpinorsExtras` package is distributed with an extensive automated test suite consisting of more than four thousand tests. To run the tests one needs `MUnit` package that is distributed with Wolfram Workbench.

3.4 Bugs and requests

Bug reports and feature requests can be posted as [GitHub issues](#) (the preferred way) or sent directly to [author's email](#).

4 Symbols reference

An overview of all public symbols introduced by `SpinorsExtras` package.

Reference vectors and spinors

`SpRef` - Labels default reference spinor for given Lorentz vector.

`RefInvariantQ` - Tests whether expression is invariant with respect to changes of reference spinors.

`RefSimplify` - Finds simplest form of expression by inserting possible reference spinors.

`ExplicitRef` - Changes implicit reference vectors, in given expressions, to explicit reference vectors.

`ImplicitRef` - Changes explicit reference vectors, in given expressions, to implicit reference vectors.

Massive vectors and spinors

`SpM` - Labels spinor for given massive momentum.

`SpAssoc` - Labels vector associated, by light cone decomposition, with massive momentum.

`LightConeDecompose` - Performs light cone decomposition of vectors and spinors.

`MassiveSpinorQ` - Tests whether given expression is interpretable as massive spinor.

`MassiveLVectorQ` - Tests whether given expression is interpretable as massive `LVector`.

Composite vectors

`LvBA` - Labels vector composed of two independent spinors with different labels.

Polarization vectors

`PolVec` - Labels polarization vector for given momentum, polarization and reference vector.

`ExpandPolVec` - Expresses polarization vectors by momentum and reference vectors.

`DeclarePossiblePol` - Sets given symbols to be treated as vector boson polarization.

`UndeclarePossiblePol` - Removes given symbols from list of vector boson polarizations.

`PossiblePolQ` - Tests whether given expression is interpretable as vector boson polarization.

Utilities

`ReplaceLVector` - Replaces given Lorentz vector in given expression.

`ReplaceBSpinor` - Replaces given massless or massive B spinor in given expression.

`ReplaceASpinor` - Replaces given massless or massive A spinor in given expression.

`ExpandMPToSpinors` - Replaces Minkowski products by spinor products.

`ExpandSToMPs` - Replaces s invariants by Minkowski products.

DeclarePlusMinusOne - Sets given symbols to be treated as ± 1 .

UndeclarePlusMinusOne - Removes given symbols from list of expressions treated as ± 1 .

PlusMinusOneQ - Tests whether given expression is interpretable as ± 1 .

AnySpinorQ - Tests whether given expression is interpretable as massless or massive spinor.

Proportional spinors and vectors

DeclareBSpinorProportional - Declares that B spinors with given labels are proportional.

DeclareASpinorProportional - Declares that A spinors with given labels are proportional.

DeclareLVectorProportional - Declares that LVectors with given labels are proportional.

BSpinorProportionalQ - Tests whether B spinors with given labels are proportional.

ASpinorProportionalQ - Tests whether A spinors with given labels are proportional.

LVectorProportionalQ - Tests whether LVectors with given labels are proportional.

Phases management

AppendPhase - Multiplies parts of expression with additional phases.

Phase - Represents additional phase of given expression.

Spinor decomposition

DecomposeBSpinor - Decomposes B spinor in given basis.

DecomposeASpinor - Decomposes A spinor in given basis.

Simple Tensors

SimpleTensorQ - Tests whether given expression represents simple tensor.

SimpleTensorGetBLabel - Extracts B spinor from tensor product of B and A spinors.

SimpleTensorGetALabel - Extracts A spinor from tensor product of B and A spinors.

Numerics

DeclareSpinorRandomMomentum - Generates random numerics for given spinor.

GenComplexMomenta - Generates random complex momenta for spinors so that they sum to zero.

Functions from original Spinors' context with modified behavior

SpOpen - Decomposes spinor chains to products of smaller spinor chains.

ExpandSToSpinors - Converts s invariants to products of spinor chains.

4.1 Reference vectors and spinors

4.1.1 SpRef

Labels default reference spinor for given Lorentz vector.

SpRef[*P*]
represents default reference vector associated with four-vector *P*.

■ For arbitrary four-vector $P = \{P_0, P_1, P_2, P_3\}$, **SpRef**[*P*] labels lightlike four-vector with default numerical components: $\{\pm\sqrt{(P_1^2 + P_2^2 + P_3^2)}, -P_1, -P_2, -P_3\}$.

4.1.2 RefInvariantQ

Tests whether expression is invariant with respect to changes of reference spinors.

<code>RefInvariantQ[expr, ref → {a, b, ...}]</code>
returns result of comparison between numerical values of <i>expr</i> with <i>ref</i> replaced by <i>a, b, ...</i> (those spinors should have declared numerical values).
<code>RefInvariantQ[expr, patt → {a, b, ...}]</code>
replaces all occurrences of labels that match <i>patt</i> .
<code>RefInvariantQ[expr, patt → {a, b, ...}]</code>
replaces all occurrences of labels that match <i>patt</i> . <i>patt</i> can contain named sub-patterns that can be used on RHS of $\rightarrow$.
<code>RefInvariantQ[expr, ref]</code>
returns comparison between numerical values of <i>expr</i> with <i>ref</i> replaced by two different random spinors.
<code>RefInvariantQ[expr, patt]</code>
replaces all occurrences of labels that match <i>patt</i> .
<code>RefInvariantQ[expr, {ref₁, ref₂ → {a₂, b₂, ...}, ...}]</code>
tests invariance with respect to reference vectors <i>ref₁, ref₂, ...</i>
<code>RefInvariantQ[expr, {{ref₁₁, ...}, {ref₂₁ → {a₂₁, b₂₁, ...}, ...}, ...}]</code>
returns a List, each element of this list is a result of invariance test of <i>expr</i> using subsequent list of patterns and rules.
<code>RefInvariantQ[expr]</code>
tests invariance with respect to all explicit reference vectors found in <i>expr</i> .

■ The following options can be given:

"Accuracy"	Automatic	effective number of digits to the right of the decimal point used for testing of equality of numerical values for different reference vectors
"PostReplace"	Identity	function used to postprocess result of reference vectors replacement
"Comparison"	Equal	function used to compare results of reference vectors replacement
"Verbose"	False	whether subsequent results should be printed

4.1.3 RefSimplify

Finds simplest form of expression by inserting possible reference spinors.

`RefSimplify[expr, ref → {a, b, ...}]`

returns simplest expression from list of results of replacing, in *expr*, spinor *ref* with *a, b, ...*

`RefSimplify[expr, ref → patt]`

uses, for replacement, spinors found in *expr* that match pattern *patt*.

`RefSimplify[expr, refPatt → ...]`

replaces all occurrences of labels that match *refPatt*.

`RefSimplify[expr, refPatt ⇒ ...]`

replaces all occurrences of labels that match *refPatt*. *refPatt* can contain named sub-patterns that can be used on RHS of $\Rightarrow$.

`RefSimplify[expr, ref]`

uses all spinors found in *expr* except *ref*.

`RefSimplify[expr, refPatt]`

replaces all occurrences of labels that match *refPatt*. For replacement uses all spinors found in *expr* except those that match *refPatt*.

`RefSimplify[expr, {ref1, ref2 → patt2, refPatt3 → {a3, b3, ...}, ...}]`

simplifies *expr* with respect to reference vectors matching: *ref₁, ref₂, refPatt₃, ...*

`RefSimplify[expr, {{ref11, ref12 → patt12, ...}, {refPatt21 → {a21, b21, ...}, ...}, ...}]`

returns a List, each element of this list is a result of simplification of *expr* using subsequent list of patterns and rules.

`RefSimplify[expr]`

simplifies *expr* with respect to all explicit reference vectors found in *expr*.

- The following options can be given:

"PostReplace"	Simplify	function used to postprocess result of reference vectors replacement
"SimplicityMeasure"	LeafCount	function used to measure "simplicity" of results for different reference vectors, result with smallest value is considered simplest
"IndependentSpinors"	True	whether composite vectors, constructed by treating replacement labels as independent B and A spinors, should be used
"ReplacementPattern"	_?SpinorQ	pattern used to extract, from given expression, spinors for replacement
"ExcludeReplacedRef"	True	whether replaced reference vectors should be excluded from list of spinors extracted from expression
"ExcludeInfinities"	True	whether indeterminate and infinite results should be excluded from results
"QuietInfinityWarnings"	True	whether messages informing about infinities and indeterminate results should be quieted
"Verbose"	False	whether subsequent results and warnings about reference vectors not present in expression should be printed
"PrintFunction"	Function[{rule, simplicity, result, accepted}, With[{rejected = If[accepted, "" (*else*), "Rejected: "]}], Print[rejected, simplicity, ": ", rule, ": ", result]]]	function used to print result if "Verbose" option is set to true. This function should accept 4 arguments: replacement rules used for obtaining particular result, simplicity of result, result itself, boolean informing whether result was accepted

4.1.4 ExplicitRef

Changes implicit reference vectors, in given expressions, to explicit reference vectors.

ExplicitRef[*expr*]
returns *expr* where all occurrences of SpAssoc, SpM and PolVec with implicit reference vectors have added explicit default reference vectors.

ExplicitRef[*expr*, *P*]
adds reference vectors only to SpAssoc, SpM and PolVec with label *P*.

ExplicitRef[*expr*, *patt*]
adds reference vectors only to SpAssoc, SpM and PolVec with labels matching *patt*.

4.1.5 ImplicitRef

Changes explicit reference vectors, in given expressions, to implicit reference vectors.

`ImplicitRef[expr]`
returns *expr* where all occurrences of `SpAssoc`, `SpM` and `PolVec` with explicit default reference vectors have those vectors removed.

`ImplicitRef[expr, P]`
removes reference vectors only from `SpAssoc`, `SpM` and `PolVec` with label *P*.

`ImplicitRef[expr, patt]`
removes reference vectors only from `SpAssoc`, `SpM` and `PolVec` with labels matching *patt*.

- The following options can be given:

<code>HideNonDefault</code>	<code>False</code>	whether to remove all explicit reference vectors including non-default ones
-----------------------------	--------------------	---

4.2 Massive vectors and spinors

4.2.1 SpM

Labels spinor for given massive momentum.

`SpM[P, +1]`
represents u spinor associated with non-lightlike four-vector *P* and default reference spinor.

`SpM[P, -1]`
represents v spinor associated with non-lightlike four-vector *P* and default reference spinor.

`SpM[P, +1, ref]`
represents u spinor associated with non-lightlike four-vector *P* and reference spinor *ref*.

`SpM[P, -1, ref]`
represents v spinor associated with non-lightlike four-vector *P* and reference spinor *ref*.

4.2.2 SpAssoc

Labels vector associated, by light cone decomposition, with massive momentum.

`SpAssoc[P]`
represents lightlike vector associated with four-vector *P* through light cone decomposition with default reference vector.

`SpAssoc[P, ref]`
represents lightlike vector associated with four-vector *P* through light cone decomposition with (massless or massive) reference vector *ref*.

- `SpAssoc[P]` for P being LVector labels lightlike four-vector $P^b = P - \frac{p^2}{2 P \cdot q_P} q_P$ where q_P denotes default reference vector `SpRef [P]`.
- `SpAssoc[P, q]` for P being LVector and q being massless Spinor labels lightlike four-vector $P^b = P - \frac{p^2}{2 P \cdot q} q$.
- `SpAssoc[P, Q]` for P being LVector and Q being massive LVector labels lightlike four-vector P^b obtained by "simultaneous" lightcone decomposition of P and Q such that: $P = P^Q - \frac{p^2}{2 P^Q \cdot Q^P} Q^P$ and $Q = Q^P - \frac{Q^2}{2 Q^P \cdot P^Q} P^Q$.

4.2.3 LightConeDecompose

Performs light cone decomposition of vectors and spinors.

`LightConeDecompose[expr, P]`

performs light cone decomposition of Lorentz vectors and massive spinors, in *expr*, with label P . Lorentz vectors are decomposed with default reference vector and massive spinors with their reference vectors.

`LightConeDecompose[expr, patt]`

performs light cone decomposition of those Lorentz vectors and massive spinors in *expr* which label matches pattern *patt*. Lorentz vectors are decomposed with default reference vector and massive spinors with their reference vectors.

`LightConeDecompose[expr, P → q]`

with q being massless spinor. Decomposes Lorentz vectors and massive spinors, in *expr*, with label P . Lorentz vectors and spinors with implicit reference vectors are decomposed with reference vector q and massive spinors with explicit reference vector are decomposed with their reference vectors.

`LightConeDecompose[expr, P → Q]`

with Q being massive LVector. Decomposition where Lorentz vectors and spinors with implicit reference vectors are decomposed with reference vector being vector associated with Q coming from simultaneous decomposition with P . Massive spinors with explicit reference vectors are decomposed with their reference vectors.

`LightConeDecompose[expr, patt → x]`

decomposes all Lorentz vectors and massive spinors of which label matches pattern *patt*. Lorentz vectors and spinors with implicit reference vectors are decomposed with reference vector inferred from x and massive spinors with explicit reference vectors are decomposed with their reference vectors.

`LightConeDecompose[expr, patt → replacement]`

Decomposition with reference vector inferred from *replacement*. *patt* can have named patterns inside and *replacement* can use variables matched by those named patterns.

`LightConeDecompose[expr, {p1 → x1, p2, p3 → x3, ...}]`

performs decompositions using all given patterns and rules.

`LightConeDecompose[expr, {{p11 → x11, p12, ...}, {p21 → x21, ...}, ...}]`

returns a List, each element of this list is a result of decomposition using subsequent list of patterns and rules.

`LightConeDecompose[expr]`

Decomposes Lorentz vectors and massive spinors with all labels. Lorentz vectors are decomposed with default reference vector and massive spinors with their reference vectors.

- The following options can be given:

"ForceRefChange"	False	whether SpM with explicit reference spinors should have their reference spinors changed to one used by LightConeDecompose
------------------	-------	---

4.2.4 MassiveSpinorQ

Tests whether given expression is interpretable as massive spinor.

MassiveSpinorQ[*x*]
returns True if *x* is interpretable as massive spinor label. Returns False otherwise.

4.2.5 MassiveLVectorQ

Tests whether given expression is interpretable as massive LVector.

MassiveLVectorQ[*x*]
returns True if *x* is interpretable as LVector but not as a massless Spinor. Returns False otherwise.

4.3 Composite vectors

4.3.1 LvBA

Labels vector composed of two independent spinors with different labels.

LvBA[*b*, *a*]
represents vector composed of two independent massless or massive spinors labeled by *b* and *a*: $\frac{[b | \gamma^\mu | a \rangle}{2}$.

- If at least one of spinors is massless than LvBA[*b*, *a*] is also massless.

4.4 Polarization vectors

4.4.1 PolVec

Labels polarization vector for given momentum, polarization and reference vector.

PolVec[*P*, *pol*]
represents polarization vector of vector boson with momentum *P*, polarization *pol* and implicit reference vector.

PolVec[*P*, *pol*, *ref*]
represents polarization vector of vector boson with momentum *P*, polarization *pol* and reference vector *ref*.

- Transverse polarization vectors are lightlike four-vectors, so PolVec[*P*, ±1, ...] can be interpreted as massless spinor.

4.4.2 ExpandPolVec

Expresses polarization vectors by momentum and reference vectors.

`ExpandPolVec[expr, PolVec[P, pol]]`
returns *expr* with occurrences of polarization vectors `PolVec[P, pol]` replaced by proper, for given polarization *pol*, combinations of four-vectors, slashed matrices and spinors associated with momentum *P* and default reference vector.

`ExpandPolVec[expr, PolVec[P, pol, q]]`
decomposes occurrences of `PolVec[P, pol, q]`, in *expr*, using reference vector *q*.

`ExpandPolVec[expr, patt]`
decomposes those occurrences of polarization vectors, in *expr*, which match pattern *patt*.

`ExpandPolVec[expr]`
decomposes all polarization vectors in given expression *expr*.

■ The following options can be given:

<code>PhaseConvention</code>	<code>Automatic</code>	name of convention that will be passed as first argument of <code>Phase</code> of expanded polarization vectors
------------------------------	------------------------	---

4.4.3 DeclarePossiblePol

Sets given symbols to be treated as vector boson polarization.

`DeclarePossiblePol[x]`
declares *x* as symbolic representation of possible vector boson polarizations.

`DeclarePossiblePol[x, y, ...]`
declares *x, y, ...* as symbolic representations of possible vector boson polarizations.

4.4.4 UndeclarePossiblePol

Removes given symbols from list of vector boson polarizations.

`UndeclarePossiblePol[x]`
removes *x* from list of symbolic representations of possible vector boson polarizations.

`UndeclarePossiblePol[x, y, ...]`
removes *x, y, ...* from list of symbolic representations of possible vector boson polarizations.

4.4.5 PossiblePolQ

Tests whether given expression is interpretable as vector boson polarization.

PossiblePolQ[x]
 returns **True** if x represents possible vector boson polarization.

4.5 Utilities

4.5.1 ReplaceLVector

Replaces given Lorentz vector in given expression.

ReplaceLVector[$expr, P \rightarrow Q$]
 returns $expr$ with Lorentz vector P replaced by Q .

ReplaceLVector[$expr, patt \rightarrow Q$]
 returns $expr$ with all Lorentz vectors that match pattern $patt$ replaced by Q .

ReplaceLVector[$expr, patt \rightarrow replacement$]
 returns $expr$ with all Lorentz vectors that match pattern $patt$ replaced by $replacement$. $patt$ can have named patterns inside and $replacement$ can use variables matched by those named patterns.

ReplaceLVector[$expr, \{P \rightarrow Q, patt \rightarrow replacement, \dots\}$]
 returns $expr$ with replacement using all given rules.

ReplaceLVector[$expr, \{\{P1 \rightarrow Q1, \dots\}, \{P2 \rightarrow Q2, \dots\}, \dots\}$]
 returns a List, each element of this list is a result of replacement using subsequent list of rules.

- **ReplaceLVector** behaves similar to built-in **ReplaceAll** function but replaces only expressions that are found in places where they can be interpreted as objects proportional to four-vector. So e.g. label inside spinor chain (representing slashed matrix) can be replaced, but label at the end of spinor chain (representing spinor - an object that scales as square root of four-vector) will never be replaced.

4.5.2 ReplaceBSpinor

Replaces given massless or massive B spinor in given expression.

ReplaceBSpinor $[expr, x \rightarrow r]$
 returns *expr* with massless or massive B spinors, labeled by *x*, replaced by *r*, *r* can be linear combination of massless or massive spinors.

ReplaceBSpinor $[expr, x \rightarrow \{b, a\}]$
 replaces massless or massive B spinor *x* at beginning of spinor chain with difference of B spinor *b* and A spinor *a*. B spinor *x* at end of spinor chain will be replaced by sum of B spinor *b* and A spinor *a*. *b* can be linear combinations of labels they will be interpreted as linear combinations of B spinors, analogously *a* can be linear combinations of labels and they will be interpreted as linear combinations of A spinors.

ReplaceBSpinor $[expr, patt \rightarrow r]$
 returns *expr* with all massless or massive B spinors that match pattern *patt* replaced by *r*.

ReplaceBSpinor $[expr, patt \rightarrow \{b, a\}]$
 returns *expr* with all massless or massive B spinors, at beginning of spinor chain, that match pattern *patt* replaced by difference of B spinor *b* and A spinor *a*. B spinors at end of spinor chain, that match pattern *patt*, will be replaced by sum of B spinor *b* and A spinor *a*.

ReplaceBSpinor $[expr, patt \rightarrow replacement]$
 returns *expr* with all massless or massive B spinors that match pattern *patt* replaced by *replacement*. *patt* can have named patterns inside and *replacement* can use variables matched by those named patterns.

ReplaceBSpinor $[expr, patt \rightarrow \{replacementB, replacementA\}]$
 replaces B spinors, that match pattern *patt*, with difference of B spinor *replacementB* and A spinor *replacementA*. B spinors at end of spinor chain, that match pattern *patt*, will be replaced by sum of B spinor *replacementB* and A spinor *replacementA*. *replacementB* and *replacementA* can use variables matched by named patterns in *patt*.

ReplaceBSpinor $[expr, \{x \rightarrow \{b, a\}, patt \rightarrow replacement, \dots\}]$
 returns *expr* with replacement using all given rules.

ReplaceBSpinor $[expr, \{\{x_1 \rightarrow r_1, \dots\}, \{x_2 \rightarrow \{b_2, a_2\}, \dots\}, \dots\}]$
 returns a List, each element of this list is a result of replacement using subsequent list of rules.

- **ReplaceBSpinor** behaves as built-in **ReplaceAll** function but replaces only expressions that are found in places where they can be interpreted as massless or massive B spinors.

4.5.3 ReplaceASpinor

Replaces given massless or massive A spinor in given expression.

ReplaceASpinor $[expr, x \rightarrow r]$
 returns *expr* with massless or massive A spinors, labeled by *x*, replaced by *r*, *r* can be linear combination of massless or massive spinors.

ReplaceASpinor $[expr, x \rightarrow \{a, b\}]$
 replaces massless or massive A spinor *x* at beginning of spinor chain with difference of A spinor *a* and B spinor *b*. A spinor *x* at end of spinor chain will be replaced by sum of A spinor *a* and B spinor *b*. *b* can be linear combinations of labels they will be interpreted as linear combinations of B spinors, analogously *a* can be linear combinations of labels and they will be interpreted as linear combinations of A spinors.

ReplaceASpinor $[expr, patt \rightarrow r]$
 returns *expr* with all massless or massive A spinors that match pattern *patt* replaced by *r*.

ReplaceASpinor $[expr, patt \rightarrow \{a, b\}]$
 returns *expr* with all massless or massive A spinors, at beginning of spinor chain, that match pattern *patt* replaced by difference of A spinor *a* and B spinor *b*. A spinors at end of spinor chain, that match pattern *patt*, will be replaced by sum of A spinor *a* and B spinor *b*.

ReplaceASpinor $[expr, patt \rightarrow replacement]$
 returns *expr* with all massless or massive A spinors that match pattern *patt* replaced by *replacement*. *patt* can have named patterns inside and *replacement* can use variables matched by those named patterns.

ReplaceASpinor $[expr, patt \rightarrow \{replacementA, replacementB\}]$
 replaces A spinors, that match pattern *patt*, with difference of A spinor *replacementA* and B spinor *replacementB*. A spinors at end of spinor chain, that match pattern *patt*, will be replaced by sum of A spinor *replacementA* and B spinor *replacementB*. *replacementB* and *replacementA* can use variables matched by named patterns in *patt*.

ReplaceASpinor $[expr, \{x \rightarrow \{a, b\}, patt \rightarrow replacement, \dots\}]$
 returns *expr* with replacement using all given rules.

ReplaceASpinor $[expr, \{\{x_1 \rightarrow r_1, \dots\}, \{x_2 \rightarrow \{a_2, b_2\}, \dots\}, \dots\}]$
 returns a List, each element of this list is a result of replacement using subsequent list of rules.

- **ReplaceASpinor** behaves as built-in **ReplaceAll** function but replaces only expressions that are found in places where they can be interpreted as massless or massive A spinors.

4.5.4 ExpandMPToSpinors

Replaces Minkowski products by spinor products.

ExpandMPToSpinors $[expr, a]$
 returns *expr* with Minkowski products (MP) containing label *a* replaced by spinor products.

ExpandMPToSpinors $[expr, patt]$
 returns *expr* with Minkowski products (MP) containing labels matching *patt* replaced by spinor products.

ExpandMPToSpinors $[expr]$
 returns *expr* with all Minkowski products (MP) replaced by spinor products.

- The following options can be given:

"Massive"	True	whether to expand Minkowski products of massive LVectors
"UOrVFunction"	1 &	function that accept LVector label and returns +1 for u spinor or -1 for v spinor

4.5.5 ExpandStoMPs

Replaces s invariants by Minkowski products.

ExpandStoMPs [*expr*]
returns *expr* with invariants $s[P, Q, \dots]$ replaced by Minkowski products (MP).

- The following options can be given:

"Massive"	True	whether to expand s invariants containing massive LVectors
-----------	------	--

4.5.6 DeclarePlusMinusOne

Sets given symbols to be treated as ± 1 .

DeclarePlusMinusOne [*x*]
declares x as symbolic representation of +1 or -1.

DeclarePlusMinusOne [*x, y, ...*]
declares $x, y, \dots$ as symbolic representations of +1 or -1.

4.5.7 UndeclarePlusMinusOne

Removes given symbols from list of expressions treated as ± 1 .

UndeclarePlusMinusOne [*x*]
removes x from list of symbolic representations of +1 or -1.

UndeclarePlusMinusOne [*x, y, ...*]
removes $x, y, \dots$ from list of symbolic representations of +1 or -1.

4.5.8 PlusMinusOneQ

Tests whether given expression is interpretable as ± 1 .

PlusMinusOneQ [*x*]
returns True if x represents +1 or -1.

- It is used internally to check whether something represents possible sign of spin projection.

4.5.9 AnySpinorQ

Tests whether given expression is interpretable as massless or massive spinor.

```
AnySpinorQ[x]
returns True if x is interpretable as massless or massive spinor label. Returns False otherwise.
```

4.6 Proportional spinors and vectors

4.6.1 DeclareBSpinorProportional

Declares that B spinors with given labels are proportional.

```
DeclareBSpinorProportional[x, y, ...]
sets B spinors |x], |y], ... to be treated as proportional.
```

4.6.2 DeclareASpinorProportional

Declares that A spinors with given labels are proportional.

```
DeclareASpinorProportional[x, y, ...]
sets A spinors |x>, |y>, ... to be treated as proportional.
```

4.6.3 DeclareLVectorProportional

Declares that LVectors with given labels are proportional.

```
DeclareLVectorProportional[x, y, ...]
sets B and A spinors labeled by x, y, ... to be treated as proportional, which means that corresponding
four-vectors are proportional.
```

4.6.4 BSpinorProportionalQ

Tests whether B spinors with given labels are proportional.

```
BSpinorProportionalQ[x, y, ...] or BSpinorProportionalQ[{x, y, ...}]
returns True if |x], |y], ... B spinors are proportional. Returns False otherwise.
```

4.6.5 ASpinorProportionalQ

Tests whether A spinors with given labels are proportional.

```
ASpinorProportionalQ[x, y, ...] or ASpinorProportionalQ[{x, y, ...}]  
returns True if  $|x\rangle, |y\rangle, \dots$  A spinors are proportional. Returns False otherwise.
```

4.6.6 LVectorProportionalQ

Tests whether LVectors with given labels are proportional.

```
LVectorProportionalQ[x, y, ...] or LVectorProportionalQ[{x, y, ...}]  
returns True if x, y, ... label four-vectors that are proportional. Returns False otherwise.
```

- Null four-vectors are proportional iff B spinors associated with them are proportional to each other and so are A spinors.

4.7 Phases management

4.7.1 AppendPhase

Multiplies parts of expression with additional phases.

```
AppendPhase[expr, patt]  
multiplies each subexpression of expr, that match pattern patt, with a Phase.
```

- The following options can be given:

"PhaseConvention"	Automatic	name of convention that will be passed as first argument of appended Phase
-------------------	-----------	--

4.7.2 Phase

Represents additional phase of given expression.

```
Phase[phaseConvention, expr]  
represents additional phase of expression represented by expr.
```

4.8 Spinor decomposition

4.8.1 DecomposeBSpinor

Decomposes B spinor in given basis.

`DecomposeBSpinor[expr, a → {b, c}]`

returns *expr* with all occurrences of spinor $|a\rangle$ decomposed in basis $\{|b\rangle, |c\rangle\}$: $|a\rangle = \frac{\langle c|a\rangle}{\langle c|b\rangle} |b\rangle + \frac{\langle b|a\rangle}{\langle b|c\rangle} |c\rangle$.

4.8.2 DecomposeASpinor

Decomposes A spinor in given basis.

`DecomposeASpinor[expr, a → {b, c}]`

returns *expr* with all occurrences of spinor $|a\rangle$ decomposed in basis $\{|b\rangle, |c\rangle\}$: $|a\rangle = \frac{\langle c|a\rangle}{\langle c|b\rangle} |b\rangle + \frac{\langle b|a\rangle}{\langle b|c\rangle} |c\rangle$.

4.9 Simple Tensors

4.9.1 SimpleTensorQ

Tests whether given expression represents simple tensor.

`SimpleTensorQ[expr]`

returns `True` if *expr* represents simple tensor e.g. $|a\rangle|b\rangle$. Returns `False` otherwise.

4.9.2 SimpleTensorGetBLabel

Extracts B spinor from tensor product of B and A spinors.

`SimpleTensorGetBLabel[expr]`

returns label of B spinor from simple tensor *expr*.

4.9.3 SimpleTensorGetALabel

Extracts A spinor from tensor product of B and A spinors.

`SimpleTensorGetALabel[expr]`

returns label of A spinor from simple tensor *expr*.

- The following options can be given:

`GetCoefficient`

`False`

whether extracted A spinor label should be multiplied with coefficient multiplying simple tensor

4.10 Numerics

4.10.1 DeclareSpinorRandomMomentum

Generates random numerics for given spinor.

`DeclareSpinorRandomMomentum[a, maxP]`
declares random four-vector with three-vector components between $-maxP$ and $+maxP$, and with positive energy, to be the four-vector associated with a spinor.

`DeclareSpinorRandomMomentum[a]`
uses 1 as default value for $maxP$.

- The following options can be given:

"Complex"	False	whether to allow complex components in four-momentum
-----------	-------	--

4.10.2 GenComplexMomenta

Generates random complex momenta for spinors so that they sum to zero.

`GenComplexMomenta[{s1, s2, s3}]`
generates random complex four momenta for the spinors s_1, s_2, s_3 so that they sum to zero.

- The following options can be given:

"Range"	{1 + I, -1 - I}	range in which components of generated spinors will be
---------	-----------------	--

4.11 Functions from original Spinors` context with modified behavior

4.11.1 SpOpen

Decomposes spinor chains to products of smaller spinor chains.

`SpOpen[x]`
decomposes spinor products in x containing slashed matrices into products of smaller spinor products, by applying: $k\text{-slashed} = |k\rangle [k] + |k\rangle\langle k|$.

`SpOpen[x, a]`
does the same selectively, at the occurrence of a -slashed.

`SpOpen[x, patt]`
does the same selectively, at the occurrence of any massless Spinor that matches pattern $patt$.

- The following options can be given:

"BothEndsMassive"	False	whether to decompose spinor chains with massive spinors on both ends
-------------------	-------	--

4.11.2 ExpandSToSpinors

Converts s invariants to products of spinor chains.

`ExpandSToSpinors[x]`
converts the invariants $s[i, j]$ in x into products of spinor products.

- The following options can be given:

"Massive"	True	whether to expand s invariants containing massive LVectors
"UOrVFunction"	1 &	function that accept LVector label and returns +1 for u spinor or -1 for v spinor

5 Tutorial

In this Section we illustrate how `SpinorsExtras` package can be used for calculation of amplitudes including massive spinors and vector bosons on the simple case of QED with photons, electrons and muons. As an example, we calculate the tree level amplitude for $e^-\mu^- \rightarrow e^-\mu^-$ scattering using on-shell recursion method. Then we compare it with amplitude calculated using Feynman diagrams and test invariance with respect to change of various reference vectors. The same example is included in the form of Mathematica tutorial in `SpinorsExtras` package, and after installing it, can be found in Mathematica Documentation Center e.g. by searching for "SpinorsExtras tutorial".

Throughout this tutorial basic familiarity with S@M package is assumed and only functions added in `SpinorsExtras` package are introduced in definition boxes.

To use `SpinorsExtras`, one needs to import the package first:

```
In[1]:= Needs["SpinorsExtras`"]
```

```
----- SPINORS @ MATHEMATICA (S@M) -----
```

```
Version: S@M 1.0 (3-APR-2007)
```

```
Authors:
```

```
Daniel Maitre (SLAC),
```

```
Pierpaolo Mastrolia (University of Zurich)
```

```
A list of all functions provided by the package
is stored in the variable
$SpinorsFunctions
```

```
----- SpinorsExtras -----
```

```
Version: 1.0.0 (2014.06.18)
```

```
Author: Jakub Kuczmarski (University of Warsaw)
```

```
Documentation: Documentation Center Online version
```

<code>SpM[p, 1]</code>	Labels u spinor for massive momentum p .
<code>PolVec[k, pol]</code> or $\epsilon^{pol}(k)$	Labels polarization vector for momentum k , and polarization pol .
<code>LightConeDecompose[expr, patt]</code>	Performs light cone decomposition of those massive Lorentz vectors and spinors, in $expr$, that match $patt$.
<code>SpRef[k]</code> or q_k	Labels default reference spinor for Lorentz vector k .
<code>SpAssoc[p, q]</code> or p^q	Labels vector associated with massive momentum p by light cone decomposition with (massive or massless) reference vector q .
<code>ExpandPolVec[expr]</code>	Expresses polarization vectors in $expr$ by momentum and reference vectors.
<code>ReplaceLVector[expr, x→y]</code>	Replaces, in $expr$, Lorentz vectors labeled by x with Lorentz vectors labeled by y .
<code>ReplaceSpinor[expr, x→y]</code>	Replaces, in $expr$, spinors labeled by x with spinors labeled by y .
<code>ExplicitRef[expr, patt]</code>	Adds explicit reference vectors to all massive spinors, in $expr$, that match $patt$.
<code>ShiftBA[p1, p2, z][expr]</code>	For massive Lorentz vectors $p1, p2$, performs shift described in arXiv:hep-ph/0703021
<code>RefSimplify[expr, patt]</code>	Finds simplest form of $expr$ with respect to change of reference vectors matching $patt$.

Table 1: Functions used to calculate amplitudes using on-shell recursion.

5.1 On-shell recursion

We start from performing the amplitude calculation using the on-shell recursion technique. It can be done with following steps:

1) Define basic fermion-vector boson-fermion three point amplitudes:

```
In[1]:= A[{p1_, +1}, {k_, pol_}, {p2_, -1}] := -I Spba[SpM[p2, 1], PolVec[k, pol], SpM[p1, 1]]
A[{p1_, -1}, {k_, pol_}, {p2_, +1}] := -I Spab[SpM[p2, 1], PolVec[k, pol], SpM[p1, 1]]
A[{p1_, -1}, {k_, pol_}, {p2_, -1}] := -I Spbb[SpM[p2, 1], PolVec[k, pol], SpM[p1, 1]]
A[{p1_, +1}, {k_, pol_}, {p2_, +1}] := -I Spaa[SpM[p2, 1], PolVec[k, pol], SpM[p1, 1]]
```

2) Declare symbol to be treated as massless labels (k and mk will denote momentum of on-shell photon):

```
In[5]:= DeclareSpinor[k, mk]
{k, mk} added to the list of spinors
```


3) Declare symbols to be treated as massive labels ($p1, p3$ will denote on-shell momenta of massive electrons; $p2, p4$ momenta of muons; $kOff$ will denote momentum of off-shell photon):

```
In[6]:= DeclareLVector[p1, p2, p3, p4, kOff]
{p1, p2, p3, p4, kOff} added to the list of Lorentz vectors
```

4) Assign masses:

```
In[7]:= MP[p1, p1] ^= MP[p3, p3] ^= mE2;
MP[p2, p2] ^= MP[p4, p4] ^= mMu2;
$Assumptions = mE > 0 && mMu > 0;
```

5) Calculate electron muon scattering diagrams with on-shell photon t -channel exchange.

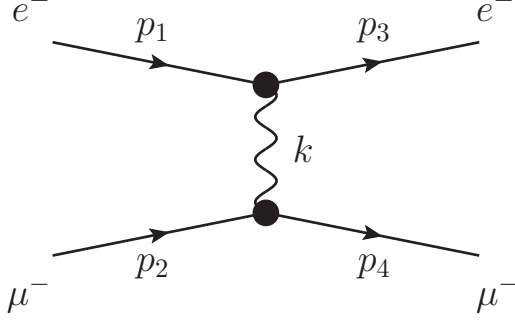

Electrons have positive and muons negative spin projections. Diagram consists of two fermion-vector boson-fermion three point amplitudes connected by photon line. Momentum transfer is denoted by k .

Symbols from S@M package are linear in labels. We a priori don't know whether label representing four-momentum $-k$ will appear in place where it'll be interpreted as object scaling linearly with four-momentum, or as object scaling as square root of four-momentum. In first case it should be labeled by $-k$ and in latter case by $\pm \mathbf{I} k$, so we temporarily use mk to represent it.

```
In[10]:= diags = Table[
  A[{p1, 1}, {k, pol}, {p3, 1}]
  1 / s13
  A[{p2, -1}, {mk, -pol}, {p4, -1}]
,
  {pol, {-1, 1}}
]
```

```
Out[10]= {{(⟨ + p1 | ε-(k) | + p3⟩ [ + p4 | ε+(mk) | + p2]) / s13,
  (⟨ + p1 | ε+(k) | + p3⟩ [ + p4 | ε-(mk) | + p2]) / s13}}
```

6) Decompose spinors for “final” particles:

```
In[11]:= diagsLCDFinal = LightConeDecompose[diags, p3 | p4] // Refine
Out[11]= {1 / s13
  (-⟨ p3b | ε-(k) | + p1⟩ - ⟨ mE < + p1 | ε-(k) | qp3⟩) / [qp3 | p3b])
  (-⟨ mMu < qp4 | ε+(mk) | + p2⟩) / ⟨ p4b | qp4⟩ - [
  + p2 | ε+(mk) | p4b], 1 / s13
  (-⟨ p3b | ε+(k) | + p1⟩ - ⟨ mE < + p1 | ε+(k) | qp3⟩) / [qp3 | p3b])
  (-⟨ mMu < qp4 | ε-(mk) | + p2⟩) / ⟨ p4b | qp4⟩ - [
  + p2 | ε-(mk) | p4b]]}
```

7) Express polarization vectors by momentum and reference vectors:

```
In[12]:= diagsExpanded = diagsLCDFinal // ExpandPolVec
Out[12]= {1 / s13 (-⟨ √2 < mk | + p2 | qmk | p4b⟩) / [qmk | mk] +
  (√2 mMu < mk | qp4 | qmk | + p2⟩) / (⟨ p4b | qp4 | qmk | mk⟩)
  ((√2 < p3b | qk < + p1 | k⟩) / ⟨ k | qk⟩ -
  (√2 mE < + p1 | qk | qp3 | k⟩) / (⟨ k | qk | qp3 | p3b⟩)),
  1 / s13 (-⟨ √2 < qmk | + p2 | p4b | mk⟩) / ⟨ mk | qmk⟩ +
  (√2 mMu < qmk | qp4 | + p2 | mk⟩) / (⟨ mk | qmk | p4b | qp4⟩)
  ((√2 < k | p3b < + p1 | qk | qk | k⟩) / [qk | k] -
  (√2 mE < k | + p1 | qp3 | qk | k⟩) / ([qk | k] [qp3 | p3b]))}
```

Lorentz vectors labeled by mk can now be replaced with $-k$ and spinors labeled by mk can be replaced with $\pm I k$ (in this simple example there are actually no Lorentz vectors mk only spinors):

```
In[13]:= ReplaceLVector[diagsExpanded, mk → -k];
diagskOnly = ReplaceSpinor[%, mk → ± I k]
```

```
Out[14]= {1/s13 (-√2 ⟨k | + p2⟩ [qmk | p4b]) / [qmk | k] +
(√2 mMu ⟨k | qp4⟩ [qmk | + p2]) / ((p4o | qp4) [qmk | k]))
((√2 ⟨p3o | qk⟩ ⟨+ p1 | k⟩) / ⟨k | qk⟩ -
(√2 mE ⟨+ p1 | qk⟩ [qp3 | k]) / (⟨k | qk⟩ [qp3 | p3o])) ,
1/s13 (-√2 ⟨qmk | + p2⟩ [p4b | k]) / ⟨k | qmk⟩ +
(√2 mMu ⟨qmk | qp4⟩ [+ p2 | k]) / (⟨k | qmk⟩ ⟨p4b | qp4⟩)
((√2 ⟨k | p3o⟩ ⟨+ p1 | qk⟩) / [qk | k] -
(√2 mE ⟨k | + p1⟩ [qp3 | qk]) / ([qk | k] [qp3 | p3o])) }
```

8) Add explicit reference vectors to massive spinors that we intend to shift:

```
In[15]:= diagsExplRef = ExplicitRef[diagskOnly, p1 | p2]
```

```
Out[15]= {1/s13 (-√2 ⟨k | qp2 p2⟩ [qmk | p4b]) / [qmk | k] +
(√2 mMu ⟨k | qp4⟩ [qmk | qp2 p2]) / ((p4o | qp4) [qmk | k]))
((√2 ⟨p3o | qk⟩ ⟨qp1 p1 | k⟩) / ⟨k | qk⟩ -
(√2 mE ⟨qp1 p1 | qk⟩ [qp3 | k]) / (⟨k | qk⟩ [qp3 | p3o])) ,
1/s13 (-√2 ⟨qmk | qp2 p2⟩ [p4b | k]) / ⟨k | qmk⟩ +
(√2 mMu ⟨qmk | qp4⟩ [qp2 p2 | k]) / (⟨k | qmk⟩ ⟨p4b | qp4⟩)
((√2 ⟨k | p3o⟩ ⟨qp1 p1 | qk⟩) / [qk | k] -
(√2 mE ⟨k | qp1 p1⟩ [qp3 | qk]) / ([qk | k] [qp3 | p3o])) }
```

9) Replace default reference vectors with reference vectors for which boundary term, for further shift, will vanish:

```
In[16]:= diagsProperRef =
diagsExplRef /. {SpRef[p1] → SpAssoc[p2, p1], SpRef[p2] → SpAssoc[p1, p2]}
```

```
Out[16]= {1/s13 (-√2 ⟨k | p1p2 p2⟩ [qmk | p4b]) / [qmk | k] +
(√2 mMu ⟨k | qp4⟩ [qmk | p1p2 p2]) / ((p4o | qp4) [qmk | k]))
((√2 ⟨p3o | qk⟩ ⟨p2p1 p1 | k⟩) / ⟨k | qk⟩ -
(√2 mE ⟨p2p1 p1 | qk⟩ [qp3 | k]) / (⟨k | qk⟩ [qp3 | p3o])) ,
1/s13 (-√2 ⟨qmk | p1p2 p2⟩ [p4b | k]) / ⟨k | qmk⟩ +
(√2 mMu ⟨qmk | qp4⟩ [p1p2 p2 | k]) / (⟨k | qmk⟩ ⟨p4b | qp4⟩)
((√2 ⟨k | p3o⟩ ⟨p2p1 p1 | qk⟩) / [qk | k] -
(√2 mE ⟨k | p2p1 p1⟩ [qp3 | qk]) / ([qk | k] [qp3 | p3o])) }
```

10) Find z that will put shifted momentum transfer on-shell:

```
In[17]:= ShiftBA[p1, p2, z] [MP2[p1 + p3]] == 0
zSol = Solve[%, z] // Flatten
```

```
Out[17]= 2 mE2 + 2 (MP[p1, p3] - 1/2 z ⟨p1p2 | p3 | p2p1⟩) == 0
```

```
Out[18]= {z → (2 (mE2 + MP[p1, p3])) / (p1p2 | p3 | p2p1)} }
```

11) Perform holomorphic shift of $p1$ and $p2$ in diagrams (in this simplified example there is actually nothing to shift except momentum transfer which we'll consider separately) and insert proper z :

```

In[19]:= diagsShifted = diagsProperRef // ShiftBA[p1, p2, z] /. zSol
Out[19]= {1 / s13 (- (sqrt(2) <k | p1^{p2} p2 | q_{mk} | p4^b | k | q_{mk} | k | +
  (sqrt(2) mMu <k | q_{p4} | q_{mk} | p1^{p2} p2 | q_{mk} | p4^b | q_{p4} | q_{mk} | k |))
  ((sqrt(2) <p3^b | q_k | q_k | p2^{p1} p1 | k |) / <k | q_k | q_k | -
  (sqrt(2) mE <p2^{p1} p1 | q_k | q_{p3} | k |) / (<k | q_k | q_{p3} | p3^b |))),
  1 / s13 (- (sqrt(2) <q_{mk} | p1^{p2} p2 | p4^b | k |) / <k | q_{mk} | k | +
  (sqrt(2) mMu <q_{mk} | q_{p4} | p1^{p2} p2 | k |) / (<k | q_{mk} | p4^b | q_{p4} |))
  ((sqrt(2) <k | p3^b | q_k | p2^{p1} p1 | q_k |) / [q_k | k | -
  (sqrt(2) mE <k | p2^{p1} p1 | q_{p3} | q_k |) / ([q_k | k | [q_{p3} | p3^b |])])}]

```

12) After shift we can decompose remaining massive spinors:

```

In[20]:= diagsShifted // LightConeDecompose // Refine;
diagsLCDA11 = % /. {SpAssoc[p1, SpAssoc[p2, p1]] -> SpAssoc[p1, p2],
SpAssoc[p2, SpAssoc[p1, p2]] -> SpAssoc[p2, p1]}
Out[21]= {1 / s13 ((sqrt(2) mMu <k | p1^{p2} p2 | q_{mk} | p4^b | k |) / (<p1^{p2} p2 | p2^{p1} | q_{mk} | k |) +
  (sqrt(2) mMu <k | q_{p4} | q_{mk} | p2^{p1} p1 | q_{mk} | p4^b | q_{p4} | q_{mk} | k |))
  ((sqrt(2) mE <p3^b | q_k | p2^{p1} p1 | k |) / (<k | q_k | p2^{p1} p1 | p1^{p2} |) -
  (sqrt(2) mE <p1^{p2} p1 | q_k | q_{p3} | k |) / (<k | q_k | q_{p3} | p3^b |))),
  1 / s13 (- (sqrt(2) mMu <p1^{p2} p2 | q_{mk} | p4^b | k |) / (<k | q_{mk} | p1^{p2} p2 | p2^{p1} |) +
  (sqrt(2) mMu <q_{mk} | q_{p4} | p2^{p1} p1 | k |) / (<k | q_{mk} | p4^b | q_{p4} |))
  (- (sqrt(2) mE <k | p3^b | q_k | p2^{p1} p1 | q_k |) / ([p2^{p1} p1 | p1^{p2} | q_k | k |] -
  (sqrt(2) mE <k | p1^{p2} p2 | q_{p3} | q_k |) / ([q_k | k | [q_{p3} | p3^b |])])})}

```

Spinors related to shifted, on-shell momentum transfer are proportional to slashed off-shell momentum transfer acting on proper spinors related to complexification vector (normalization factor can be added to any spinor):

```

In[22]:= kB = kOff[SpAssoc[p1, p2]]
kA = kOff[SpAssoc[p2, p1]] / Spba[SpAssoc[p2, p1], kOff, SpAssoc[p1, p2]]
Out[22]= kOff[p1^{p2}]
Out[23]= kOff[p2^{p1}] / (<p1^{p2} | kOff | p2^{p1})

```

13) Express photons momentum by external momenta:

```
In[24]:= ReplaceSpinor[diagsLCDall, k → {kB, kA}] // UnCompact;
ReplaceVector[%, kOff → p1 - p3];
LightConeDecompose[%, {p1 → p2, p3}];
diagsExtern = % /. s13 → s[p1, p3] // Simplify
```

```
Out[27]= { (2 mE mMu (2 MP[p3^b, qp3]
  ((p4^b | qp4) (p1^p2 | p3^b | p2^p1) [qm_k | p4^b] + (p1^p2 | p2^p1)
    ((qp4 | p3^b | p2^p1) - (qp4 | p1^p2 | p2^p1)) [qm_k | p2^p1]) +
  mE^2 ((p4^b | qp4) (p1^p2 | qp3 | p2^p1) [qm_k | p4^b] +
    (p1^p2 | p2^p1) (qp4 | qp3 | p2^p1) [qm_k | p2^p1]))
  (mE^2 MP[p1^p2, p2^p1] (p3^b | qk) (p1^p2 | qp3 | p2^p1) [qp3 | p3^b] +
    MP[p3^b, qp3]
    (mE^2 (p1^p2 | qk) (p1^p2 | p2^p1 | qp3) [p2^p1 | p1^p2] + MP[p1^p2,
      p2^p1] (-2 (p1^p2 | qk) (p1^p2 | p3^b | qp3) [p2^p1 | p1^p2] +
        2 (p3^b | qk) (p1^p2 | p3^b | p2^p1) [qp3 | p3^b]))) /
  (Sp1 p3 (p4^b | qp4) (p1^p2 | p2^p1) (MP[p3^b, qp3] (2 MP[p1^p2, p2^p1]
    (p1^p2 | p3^b | qmk) - mE^2 (p1^p2 | p2^p1 | qmk)) +
    mE^2 MP[p1^p2, p2^p1] (p1^p2 | qp3 | qmk))
  (2 MP[p3^b, qp3] ((qk | p3^b | p2^p1) - (qk | p1^p2 | p2^p1)) +
    mE^2 (qk | qp3 | p2^p1) [p2^p1 | p1^p2] [qp3 | p3^b]),
  - (2 mE mMu (MP[p3^b, qp3] (MP[p1^p2, p2^p1]
    (-2 (p4^b | qp4) (p1^p2 | qmk) (p1^p2 | p3^b | p4^b) +
      2 (p1^p2 | p2^p1) (qm_k | qp4) (p1^p2 | p3^b | p2^p1)) +
    mE^2 (p4^b | qp4) (p1^p2 | qmk) (p1^p2 | p2^p1 | p4^b) + mE^2
    MP[p1^p2, p2^p1] (- (p4^b | qp4) (p1^p2 | qmk) (p1^p2 | qp3 | p4^b) +
      (p1^p2 | p2^p1) (qm_k | qp4) (p1^p2 | qp3 | p2^p1)))
  (MP[p3^b, qp3] (-2 (p3^b | p1^p2 | p2^p1) [qk | p2^p1] [qp3 | p3^b] +
    2 (p1^p2 | p3^b | p2^p1) [p2^p1 | p1^p2] [qp3 | qk]) +
    mE^2 ((p3^b | qp3 | p2^p1) [qk | p2^p1] [qp3 | p3^b] +
      (p1^p2 | qp3 | p2^p1) [p2^p1 | p1^p2] [qp3 | qk])) /
  (Sp1 p3 (p4^b | qp4) (p1^p2 | p2^p1) (MP[p3^b, qp3] (2 MP[p1^p2, p2^p1]
    (p1^p2 | p3^b | qk) - mE^2 (p1^p2 | p2^p1 | qk)) +
    mE^2 MP[p1^p2, p2^p1] (p1^p2 | qp3 | qk))
  (2 MP[p3^b, qp3] ((qm_k | p3^b | p2^p1) - (qm_k | p1^p2 | p2^p1)) +
    mE^2 (qm_k | qp3 | p2^p1) [p2^p1 | p1^p2] [qp3 | p3^b]) }
```

14) Find simplest form of diagrams with respect to reference vectors of exchanged photon (this may take some time).

Note that since each diagram is gauge invariant we can simplify diagrams separately, so we map **RefSimplify** on list of diagrams:

```
In[28]:= diagsSimpl = RefSimplify[#, SpRef[k | mk]] & /@ diagsExtern
```

```
Out[28]= { (2 mE mMu (p3^b | p1^p2) [p2^p1 | p4^b]) /
  (Sp1 p3 (p1^p2 | p2^p1) [p2^p1 | p1^p2]),
  - (2 mE mMu (p1^p2 | qp4) [qp3 | p2^p1]) / (Sp1 p3 (p4^b | qp4) [qp3 | p3^b]) }
```

15) Sum diagrams :

```
In[29]:= ampl[1, -1, 1, -1] = diagsSimpl // Total // Simplify
```

```
Out[29]= (2 mE mMu ((p3^b | p1^p2) [p2^p1 | p4^b]) / ((p1^p2 | p2^p1) [p2^p1 | p1^p2]) -
  ((p1^p2 | qp4) [qp3 | p2^p1]) / ((p4^b | qp4) [qp3 | p3^b])) / Sp1 p3
```

5.2 Numerical results and comparison with standard amplitude

As we illustrate below SpinorsExtras package can be also used to calculate numerical values of scattering amplitudes. They can be used e.g. for testing the final result by comparing it with amplitude obtained using ordinary Feynman diagrams.

1) Assign numerical values to masses:

```
In[30]:= N[mE] = .5;
N[mMu] = 105.;
```

2) Generate random numerical momenta for external particles (such that $p_1 + p_2 = p_3 + p_4$):

```
In[32]:= SeedRandom[0];
Module[
{
  v1 = RandomReal[{-100, 100}, 3],
  v2 = RandomReal[{-100, 100}, 3],
  v1Sq, v2Sq,
  eE, eMu
}
,

{v1Sq, v2Sq} = Total[#^2] & /@ {v1, v2};
v2 =  $\sqrt{(v1Sq / v2Sq)}$  v2;
{eE, eMu} =  $\sqrt{(v1Sq + N[#]^2)}$  & /@ {mE, mMu};

DeclareLVectorMomentum[p1, Flatten[{eE, v1}]];
DeclareLVectorMomentum[p2, Flatten[{eMu, -v1}]];
DeclareLVectorMomentum[p3, Flatten[{eE, v2}]];
DeclareLVectorMomentum[p4, Flatten[{eMu, -v2}]];
]

Four Momentum p1 set to
{54.5458, 30.4936, 26.6141, 36.5626}.

Four Momentum p2 set to
{118.322, -30.4936, -26.6141, -36.5626}.

Four Momentum p3 set to
{54.5458, 5.58062, 36.6033, 40.0505}.

Four Momentum p4 set to
{118.322, -5.58062, -36.6033, -40.0505}.
```

3) Assign default numerical values to reference vectors for “final” particles:

```
In[34]:= DeclareSpinorMomentum /@ SpRef /@ {p3, p4};

Momentum for spinor  $q_{p3}$  set to
{54.5435, -5.58062, -36.6033, -40.0505}.

Momentum for spinor  $q_{p4}$  set to
{54.5435, 5.58062, 36.6033, 40.0505}.
```

4) Assign numerical values to associated vectors:

```
In[35]:= DeclareSpinorMomentum /@ {SpAssoc[p1, p2], SpAssoc[p2, p1], SpAssoc[p3], SpAssoc[p4]};

Momentum for spinor  $p_1^{p_2}$  set to
{54.5446, 30.4942, 26.6146, 36.5634}.

Momentum for spinor  $p_2^{p_1}$  set to
{86.4325, -48.3217, -42.1741, -57.9391}.

Momentum for spinor  $p_3^p$  set to
{54.5446, 5.58074, 36.6041, 40.0513}.

Momentum for spinor  $p_4^p$  set to
{86.4325, -8.84335, -58.0036, -63.4662}.
```

<code>DeclareSpinorRandomMomentum[x]</code>	Generates random numerics for x spinor.
<code>RefInvariantQ[expr, q]</code>	Checks whether $expr$ is invariant with respect to change of reference vector q .

Table 2: Functions used to test numerical invariance of amplitude.

5.2.1 Comparison with standard amplitude

5) Calculate electron muon scattering amplitude using ordinary Feynman diagrams (there is just one diagram: with off-shell photon t -channel exchange):

```
In[36]:= GammaVec = {Gamma0, Gamma1, Gamma2, Gamma3};
In[37]:= 1 / s13 MP[I Spaa[SpM[p3, 1], #, SpM[p1, 1]] & /@ GammaVec,
           I Spbb[SpM[p4, 1], #, SpM[p2, 1]] & /@ GammaVec];
           LightConeDecompose[%, {p1 → p2, p2 → p1, p3, p4}] // Refine;
           amplStandard = % /. s13 → s[p1, p3];
           % // N
Out[40]= -0.0166026 - 0.00590979 i
```

6) Compute numerical value of amplitude calculated using on-shell recursion and compare it with amplitude calculated using Feynman diagrams:

```
In[41]:= ampl[1, -1, 1, -1] // N
           % == amplStandard // N
Out[41]= -0.0166026 - 0.00590979 i
Out[42]= True
```

5.2.2 Reference vectors independence

Independence of the final results on the choice of reference vectors can be used as additional test of the correctness of the final result:

7) Assign random numerical values to reference vectors for exchanged photon:

```
In[43]:= DeclareSpinorRandomMomentum /@ SpRef /@ {k, mk};
           Momentum for spinor  $q_k$  set to
           {0.992881, -0.523097, 0.275125, -0.797803}.
           Momentum for spinor  $q_{mk}$  set to
           {0.970702, 0.291049, -0.680956, 0.627576}.
```

8) Set accuracy of numerical invariance tests:

```
In[44]:= SetOptions[RefInvariantQ, "Accuracy" → 15];
```

9) Test invariance of diagrams with respect to change of reference vectors of on-shell photon:

```
In[45]:= RefInvariantQ[diagsExtern, SpRef[k]]
           RefInvariantQ[diagsExtern, SpRef[mk]]
Out[45]= True
Out[46]= True
```

10) Test invariance of amplitude with respect to change of reference vectors of external final particles (since different reference vectors correspond to different, distinguishable states, amplitude is not invariant). Invariance testing function needs to take into account all occurrences of reference vector, so we make all occurrences explicit.

```
In[47]:= RefInvariantQ[ExplicitRef[ampl[1, -1, 1, -1], p3], SpRef[p3]]
RefInvariantQ[ExplicitRef[ampl[1, -1, 1, -1], p4], SpRef[p4]]
```

```
Out[47]= False
```

```
Out[48]= False
```

11) Calculate amplitudes with changed spin projections of final particles:

```
In[59]:= Table[
  Table[
    A[{p1, 1}, {k, pol}, {p3, finalSpins // First}]
    1 / s13 A[{p2, -1}, {mk, -pol}, {p4, finalSpins // Last}],
    {pol, {-1, 1}}
  ],
  {finalSpins, {{-1, -1}, {1, 1}}}
];
LightConeDecompose[%, p3 | p4] // Refine // ExpandPolVec;
ReplaceSpinor[%, mk → ±I k] // ShiftBA[p1, p2, z] /. zSol;
LightConeDecompose[%, {p1 → p2, p2 → p1}] // Refine;
ReplaceSpinor[%, k → {kB, kA}] // UnCompact;
ReplaceVector[%, kOff → p1 - p3];
LightConeDecompose[%, {p1 → p2, p3}] // Refine;
% /. s13 → s[p1, p3] // Simplify;
RefSimplify[#, SpRef[k | mk]] & /@%;
{ampl[1, -1, -1, -1], ampl[1, -1, 1, 1]} = Total /@% // Simplify
```

```
Out[68]= { (2 mMu ((⟨p1p2 | qp4⟩ [p2p1 | p3b]) / ⟨p4b | qp4⟩ +
  (mE2 ⟨p1p2 | qp3⟩ [p2p1 | p4b]) /
  (⟨p3b | qp3⟩ ⟨p1p2 | p2p1⟩ [p2p1 | p1p2])) / sp1 p3,
  (2 mE (- (⟨p4b | p1p2⟩ [qp3 | p2p1]) / [qp3 | p3b] -
  (mMu2 ⟨p3b | p1p2⟩ [qp4 | p2p1]) /
  (⟨p1p2 | p2p1⟩ [p2p1 | p1p2⟩ [qp4 | p4b])) / sp1 p3) }
```

12) Square of absolute value of amplitude summed over spin projections of given particle should be independent of reference vector related to this particle:

```
In[69]:= RefInvariantQ[
  ExplicitRef[Abs[ampl[1, -1, 1, -1]]2 + Abs[ampl[1, -1, -1, -1]]2, p3], SpRef[p3]]
RefInvariantQ[ExplicitRef[Abs[ampl[1, -1, 1, -1]]2 + Abs[ampl[1, -1, 1, 1]]2, p4],
  SpRef[p4]]
```

```
Out[69]= True
```

```
Out[70]= True
```

6 Conclusions

We have presented Mathematica package `SpinorsExtras` designed for manipulating objects used in quantum field theory calculations in the spinor helicity formalism. `SpinorsExtras` is an extension of already existing `S@M` package, enriching it with tools for symbolic calculation of scattering amplitudes involving massive particles. Package was designed for computations using on-shell recursion technique and implements complex shifts for massive spinors, but is also suitable for calculations using other techniques, including standard Feynman diagram computations. Thus, presented package can be also used for comparison of results obtained with different methods. Like in the `S@M` package, symbolic expressions calculated using `SpinorsExtras` can be

also evaluated numerically. Presented package provides also utilities for testing gauge invariance and for simplifying expressions with respect to change of reference vectors.

Acknowledgments

Author would like to thank Janusz Rosiek for useful discussions and comments on the manuscript. This work has been supported by Polish National Science Centre under the research grants DEC-2011/01/M/ST2/02466 and DEC-2012/05/B/ST2/02597.

References

- [1] F. A. Berends, R. Kleiss, P. De Causmaecker, R. Gastmans, and T. T. Wu, “Single Bremsstrahlung Processes in Gauge Theories,” *Phys.Lett.* **B103** (1981) 124.
- [2] P. De Causmaecker, R. Gastmans, W. Troost, and T. T. Wu, “Multiple Bremsstrahlung in Gauge Theories at High-Energies. 1. General Formalism for Quantum Electrodynamics,” *Nucl.Phys.* **B206** (1982) 53.
- [3] F. A. Berends, R. Kleiss, P. De Causmaecker, R. Gastmans, W. Troost, *et al.*, “Multiple Bremsstrahlung in Gauge Theories at High-Energies. 2. Single Bremsstrahlung,” *Nucl.Phys.* **B206** (1982) 61.
- [4] M. Caffo and E. Remiddi, “Evaluation of Transition Amplitudes Between Dirac Spinors,” *Helv.Phys.Acta* **55** (1982) 339.
- [5] J. Gunion and Z. Kunszt, “Improved Analytic Techniques for Tree Graph Calculations and the $G g q$ anti- q Lepton anti-Lepton Subprocess,” *Phys.Lett.* **B161** (1985) 333.
- [6] R. Kleiss and W. J. Stirling, “Spinor Techniques for Calculating p anti- $p \rightarrow W^{+-} / Z^0 + \text{Jets}$,” *Nucl.Phys.* **B262** (1985) 235–262.
- [7] Z. Xu, D.-H. Zhang, and L. Chang, “Helicity Amplitudes for Multiple Bremsstrahlung in Massless Nonabelian Gauge Theories,” *Nucl.Phys.* **B291** (1987) 392.
- [8] R. Britto, F. Cachazo, and B. Feng, “New recursion relations for tree amplitudes of gluons,” *Nucl.Phys.* **B715** (2005) 499–522, [arXiv:hep-th/0412308 \[hep-th\]](#).
- [9] R. Britto, F. Cachazo, B. Feng, and E. Witten, “Direct proof of tree-level recursion relation in Yang-Mills theory,” *Phys.Rev.Lett.* **94** (2005) 181602, [arXiv:hep-th/0501052 \[hep-th\]](#).
- [10] S. Badger, E. N. Glover, V. Khoze, and P. Svrcek, “Recursion relations for gauge theory amplitudes with massive particles,” *JHEP* **0507** (2005) 025, [arXiv:hep-th/0504159 \[hep-th\]](#).
- [11] S. Badger, E. N. Glover, and V. V. Khoze, “Recursion relations for gauge theory amplitudes with massive vector bosons and fermions,” *JHEP* **0601** (2006) 066, [arXiv:hep-th/0507161 \[hep-th\]](#).
- [12] K. Ozeren and W. Stirling, “Scattering amplitudes with massive fermions using BCFW recursion,” *Eur.Phys.J.* **C48** (2006) 159–168, [arXiv:hep-ph/0603071 \[hep-ph\]](#).
- [13] C. Schwinn and S. Weinzierl, “On-shell recursion relations for all Born QCD amplitudes,” *JHEP* **0704** (2007) 072, [arXiv:hep-ph/0703021 \[HEP-PH\]](#).
- [14] A. Hall, “Massive Quark-Gluon Scattering Amplitudes at Tree Level,” *Phys.Rev.* **D77** (2008) 025011, [arXiv:0710.1300 \[hep-ph\]](#).
- [15] C. Cheung, “On-Shell Recursion Relations for Generic Theories,” *JHEP* **1003** (2010) 098, [arXiv:0808.0504 \[hep-th\]](#).
- [16] T. Cohen, H. Elvang, and M. Kiermaier, “On-shell constructibility of tree amplitudes in general field theories,” *JHEP* **1104** (2011) 053, [arXiv:1010.0257 \[hep-th\]](#).
- [17] G. Chen, “Recursion relations for the general tree-level amplitudes in QCD with massive dirac fields,” *Phys.Rev.* **D83** (2011) 125005, [arXiv:1103.2518 \[hep-th\]](#).
- [18] R. Britto and A. Ochirov, “On-shell recursion for massive fermion currents,” *JHEP* **1301** (2013) 002, [arXiv:1210.1755 \[hep-th\]](#).
- [19] T. Gleisberg and S. Hoeche, “Comix, a new matrix element generator,” *JHEP* **0812** (2008) 039, [arXiv:0808.3674 \[hep-ph\]](#).

- [20] C. Berger, Z. Bern, L. Dixon, F. Febres Cordero, D. Forde, *et al.*, “An Automated Implementation of On-Shell Methods for One-Loop Amplitudes,” *Phys.Rev.* **D78** (2008) 036003, [arXiv:0803.4180 \[hep-ph\]](#).
- [21] W. Giele and G. Zanderighi, “On the Numerical Evaluation of One-Loop Amplitudes: The Gluonic Case,” *JHEP* **0806** (2008) 038, [arXiv:0805.2152 \[hep-ph\]](#).
- [22] A. Lazopoulos, “Multi-gluon one-loop amplitudes numerically,” [arXiv:0812.2998 \[hep-ph\]](#).
- [23] W. Giele, Z. Kunszt, and J. Winter, “Efficient Color-Dressed Calculation of Virtual Corrections,” *Nucl.Phys.* **B840** (2010) 214–270, [arXiv:0911.1962 \[hep-ph\]](#).
- [24] G. Cullen, M. Koch-Janusz, and T. Reiter, “Spinney: A Form Library for Helicity Spinors,” *Comput.Phys.Commun.* **182** (2011) 2368–2387, [arXiv:1008.0803 \[hep-ph\]](#).
- [25] L. J. Dixon, J. M. Henn, J. Plefka, and T. Schuster, “All tree-level amplitudes in massless QCD,” *JHEP* **1101** (2011) 035, [arXiv:1010.3991 \[hep-ph\]](#).
- [26] J. L. Bourjaily, “Efficient Tree-Amplitudes in N=4: Automatic BCFW Recursion in Mathematica,” [arXiv:1011.2447 \[hep-ph\]](#).
- [27] S. Badger, B. Biedermann, and P. Uwer, “NGLuon: A Package to Calculate One-loop Multi-gluon Amplitudes,” *Comput.Phys.Commun.* **182** (2011) 1674–1692, [arXiv:1011.2900 \[hep-ph\]](#).
- [28] G. Bevilacqua, M. Czakon, M. Garzelli, A. van Hameren, A. Kardos, *et al.*, “HELAC-NLO,” *Comput.Phys.Commun.* **184** (2013) 986–997, [arXiv:1110.1499 \[hep-ph\]](#).
- [29] V. Hirschi, R. Frederix, S. Frixione, M. V. Garzelli, F. Maltoni, *et al.*, “Automation of one-loop QCD corrections,” *JHEP* **1105** (2011) 044, [arXiv:1103.0621 \[hep-ph\]](#).
- [30] G. Cullen, N. Greiner, G. Heinrich, G. Luisoni, P. Mastrolia, *et al.*, “Automated One-Loop Calculations with GoSam,” *Eur.Phys.J.* **C72** (2012) 1889, [arXiv:1111.2034 \[hep-ph\]](#).
- [31] D. Maitre and P. Mastrolia, “S@M, a Mathematica Implementation of the Spinor-Helicity Formalism,” *Comput.Phys.Commun.* **179** (2008) 501–574, [arXiv:0710.5559 \[hep-ph\]](#).
- [32] D. A. Kosower, “Next-to-maximal helicity violating amplitudes in gauge theory,” *Phys.Rev.* **D71** (2005) 045007, [arXiv:hep-th/0406175 \[hep-th\]](#).